



6300 Series

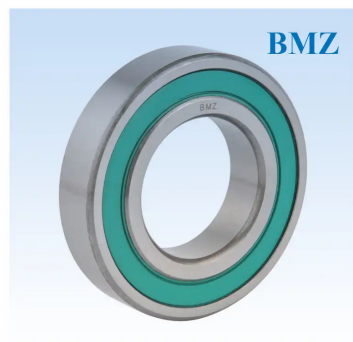

Typ	Bohrung	Außen	Breite		Radius		Last bewertung (N)		Max Geschwindigkeit	
	Durchmesser	Durchmesser	B	B1	Rs		Dynamisch	Statisch	Fett	Öl
	D (mm)	D(mm)	Mm	Mm	(Mm)		Cr	Cor	* 1000 U/min	* 1000 U/min
6310	50	110	27	27	3		62000	38000	6.40	7.70
6309	45	100	25	25	2.50		53000	32000	7	8.10
6308	40	90	23	23	2.50		40500	24100	7.80	9
6307	35	80	21	21	2.50		28290	15270	8.50	10
6306	30	72	19	19	2		22630	12080	9.60	12
6305	25	62	17	17	2		17490	9060	11	13
6304	20	52	15	15	2		13490	6310	14	17
6303	17	47	14	14	1.50		11550	5330	15	18
6302	15	42	13	13	1		9710	4370	17	20
6301	12	37	12	12	1		8240	3360	20	25
6300	10	35	11	11	0.60		6870	2750	22	27
639	9	28	10	10	0.30		4659	2080	24	30
638	8	28	9	9	0.30		4563	1983	28	34
637	7	26	9	9	0.30		4563	1983	28	34
636	6	22	6	6	0.30		3333	1423	30	36
635	5	19	6	6	0.30		2336	896	32	40
634	4	16	5	5	0.30		1340	523	36	43